



Fitting Instructions for The APD Fishtail Side-mount Retainer

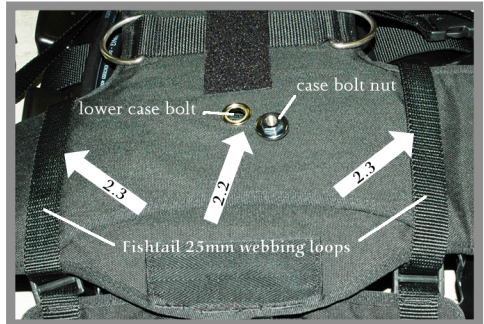

1. Undo the lower case nut & bolt (13mm spanner, 5mm hex key) and lift the harness and wing out of the way. Set the desired height of the Fishtail by locating the lower case bolt in one of the 3 eyelets, as shown.
2. (2.1) Refit the wing and then the harness.
(2.2) Refit and tighten the lower case bolt nut
(2.3) Fit the Fishtail loops around left & right wings of the harness, as shown.

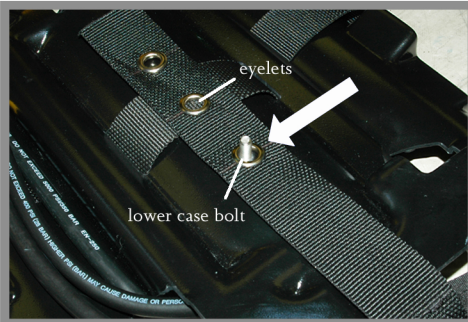

3. Secure the 2 x Fishtail 25mm webbing loops around both harness wings by feeding the webbing through the 3-bar sliders and tightening up to the bottom edge.
4. (4.1) Feed the through-the-legs strap through the harness D-ring and
(4.2) the Fishtail slot as shown.

(NB. The wing sits between case and harness. It is not shown above)